

a xylem brand

VM35/3

Magnetically Coupled Centrifugal Pump

PRINCIPAL APPLICATIONS

Hot and cold drinks vending machines ice maker machines, where the sealless design ensures the purity of vended liquid, preventing contaminants introducing bacteria or taste taint.

WETTED MATERIALS

- PP Pump Body
- Stainless steel spindle
- Nitrile or Silicone 'O' ring

FEATURES


- Low power consumption
- Variable mounting foot positions
- Customer choice of plug & lead length
- Designed for a minimum 5 years normal operation
- NSF/CE Approved



OPTIONS


VM35/3 Port Details

230V 1ph 50/60 Hz Plain 21 mm 230V 1ph 50/60 Hz 1/2" BSP M



DIMENSIONS

Drawings not to scale Dimensions in millimetres

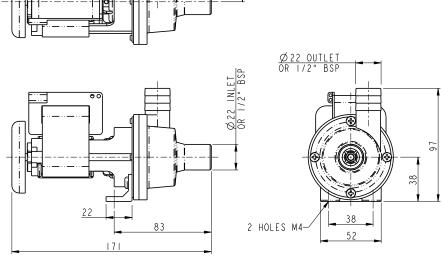


SPECIFICATION

	Model	Overall height (mm)	Overall length (mm)	Overall width (mm)	Weight (kg)	Max body pressure (bar)	Run-out flow rate (I/min)	Closed valve head (m)	Temp range (degC)	*Max specific gravity	Motor output (watts)
	VM35/3	07	171	73	1.6	1.4	50 Hz 35	2.1	-20 to	1.2	18
ı	V IVI 35/3	97					60 Hz 33	3.3	+85	1.2	

^{*}Assuming maximum viscosity of 30cp. Refer to Totton Pumps for higher viscosities and specific gravities

PERFORMANCE

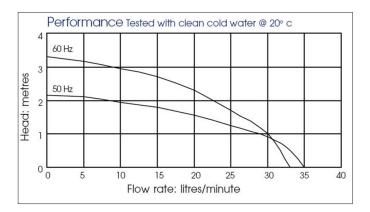


NOTE: These magnetically coupled pumps are designed for use with clean fluids.

Solids will cause jamming. Abrasives will reduce pump life and invalidate the warranty.

VM pumps are not self priming and are not designed to run dry.

The company reserves the right to change specifications.

PART LIST

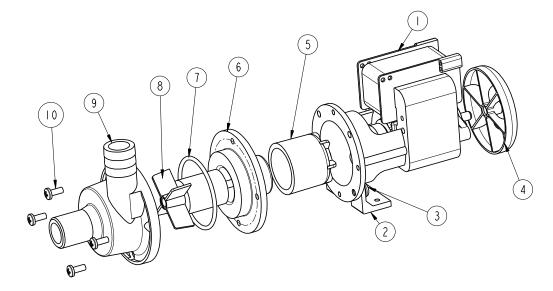

Item Number	Description	Quantity	Part Number			
1	Motor	1	-			
2	Mounting Bracket	1	043308			
3	Screw	1	031427			
4	Fan	1	033322			
5 Drive Magne		1	023267			
6	6 Spindle Housing		003357			
7	O-ring	1	003224 (Nitrile)	023224 (Silicone)		
8	Impeller	1	003282 (50 Hz)	003279 (60 Hz)		
9	9 Pump Body		013333 (plain)	013334 (threaded)		
10	10 Screw		001652			



UK Xylem

Bingley Road, Hoddesdon Hertfordshire EN11 0BU Tel: +44 (0) 1992 450145 Fax: +44 (0) 1992 467132

USA Xylem

100 Cummings Center Drive Suite 535-N, Beverly, MA 01915 Tel: +1 978 281-0440 Fax: +1 978 283-2619

ITALY Xylem

Via Tommaseo, 6 20059 Vimercate, Milano Tel: +39 039 685 2323 Fax: +39 039 666 307

GERMANY Xylem

Oststrasse 28 22844 Norderstedt Tel: +49-40-53 53 73-0 Fax: +49-40-53 53 73-11

www.xyleminc.com

JAPAN Xylem

3-21-10, Shin-Yokohama Kohoku-Ku, Yokohama, 222-0033 Tel: +81-045-475-8906 Fax: +81-045-477-1162

Warranty: All products of the company are sold, and all services of the company are offered subject to the company's warranty and terms of sale, copies of which will be furnished upon request. Details correct at time of printing. We reserve the right to change specifications without prior notice.